











#### 2009

2019

Broaden Worldwide Co., Ltd.

Established in 2009 and began the trade of selling construction fasteners.



#### 2014

Headquarters - Taiwan

The 100% Made in Taiwan, BDN FASTENERS® brand name stepped into the fasteners scene

HQ



#### 2015

OFFICE - THAILAND

BDN FASTENERS® Thailand was established in 2015, and set up as a base for sales and promotion of BDN FASTENERS® IN ASSEAN ASSECTION OF THE STATEMENT ASSEANCE ASSEANC



#### 2017

BDN FASTENERS® takes a majo step forward and builds a new facility dedicated to Heading, Threading, and Pinch Pointing processes – maximizing speed and efficiency, taking our service and quality to the next level.



#### 2018

OFFICE - INDI

Despite hard times, BDN FASTENERS® takes yet another bold step forwards, relocating to a larger storage and packaging facility for better logistics, accommodate additional personnel, and new packaging machinery.



### 2022

BDN FASTENERS® takes another bold step forwards, moving our packaging and warehouse facility to a larger area in order to provide better, faster service in the near fittire



Despite the outdorfs of COVID-19 and the world going topsy-turry, BDN FASTENERS® has taken advantage of the calm within the storm, expanding of Our facility and adding multiple collated screw assembly lines, fully prepared once the global economy bounces back to pre-pandemic levels.



### 2025

BIS Certified - IS 18471:2025

BDN FASTENERS® is officially BIS Certified. This certification confirms that our self-drilling screws meet India's highest benchmark for quality, safety, and performance, as outlined in the IS 18471:2025 standard.



# **CONTENTS**



| METAL-Tite™ Self-Drilling Screws ·····          |       |  |      |
|---|-------|--|------|
| Fixing Cladding to Metal                        | BN 3  |  | 5    |
| Fixing to Thick Steel (No.5 Drill Point)        | BN 3  |  | 6    |
| Crest Fixing Fasteners (Full Thread)            | (BN)  |  | 7    |
| Crest Fixing Fasteners (Double Thread)          | (BN)  |  | 8    |
| Stitching Fasteners (Reduced Point)             | (BN)  |  | 9    |
| Stitching Fasteners (Needle Point)              | BN 3  | - IIIIIn-  | 10   |
| Concealed Fixing Fasteners                      | 8 N   |  | 11   |
| Clip-Fix Button Head Self-Drilling Screws       |       |  | 12   |
| Framing Screws                                  |       |  |      |
| Truss to Plate Connection                       | BN3   |  | 13   |
| TRUSS-Tite™ Fixing Steel Roof and Floor Trusses | (BN)  |  | 14   |
| FRAME-Tite™ Fixing to Steel Wall Frames         | B N   |  | 15   |
| POLYXPAND™                                      |       |  |      |
| Fixing Polycarbonate Sheeting to Metal          | (BN)  |  | 16   |
| POLY-FAST™ Polycarbonate Roof Fastener          | s     |  |      |
| POLY-FAST™ Metal                                | BN 4  | - Shining this   | 17   |
| POLY-FAST™ Timber                               | BN 4  | The state of the s | 18   |
| POLY-FAST™ Duo                                  | BN 3  |  | 19   |
| Collated Screws                                 |       |  | - 20 |
| TIMBER-Tite™ Type 17 Self-Tapping Screws        | s ·   |  |      |
| Valley Fixing Fasteners                         | BN 3  |  | 21   |
| Fixing Roof Sheeting to Timber (Double Thread)  | (BN 3 |  | 22   |



# **Product Overview - BDN Fasteners®**

Coating Type: Zinc + Organic Coating (Ruspert) SGS Certification: SST 1000 hrs + Kesternich 7 cycles

| Туре                                 | BN 3                                   | (BN)<br>3  | BN 3                                   | BN 3   | BN 3   | (BN)<br>3   | BN 3        |                          |                        |
|--------------------------------------|--|--|--|--|--|-------------|-------------|--------------------------|------------------------|
| Product                              |  |  |  |  |  |             |             |                          |                        |
| Application                          |  |  |  |  |  |             |             |                          |                        |
| Max.<br>drilling<br>capacity<br>[mm] | 4.0mm thick<br>(For #10 gauge)         | 6.0mm thick<br>(For #12 gauge)                       | 12.5mm thick                           | 6.0mm thick  | 6.0mm thick  | 1+1mm thick | 1+1mm thick | 4.0mm thick              | 2.5mm thick            |
| Gauge<br>TPI x Length<br>[mm]        | 10-16 x 16<br>10-16 x 19<br>10-16 x 25 | 12-14 x 20<br>12-14 x 25<br>12-14 x 30<br>12-14 x 35 | 12-24 x 32<br>12-24 x 38<br>12-24 x 50 | 12-14 x 50<br>12-14 x 55<br>12-14 x 65<br>12-14 x 75<br>12-14 x 85<br>12-14 x 110<br>12-14 x 130 | 12-14 x 45<br>12-14 x 55<br>12-14 x 65<br>12-14 x 75<br>12-14 x 90 | 15-15 x 20  | 10-16 x 19  | 10-24 x 16<br>10-24 x 22 | 8-18 x 45<br>8-18 x 65 |
| Product<br>webpage<br>QR code        | <b>国</b> 对<br>设施<br>存少。<br>国际          | 70 E   |  | 11 12 13 13 13 13 13 13 13 13 13 13 13 13 13   |  |             | 7. II       |                          |                        |













| B N            | BN3                  | BN 3                     | BN 3                              | BN 3                                   | BN 3  | BN <sub>4</sub> | BN <sub>4</sub>                   | (BN)       | Туре                                 |
|----------------|----------------------|--------------------------|-----------------------------------|--|---|-----------------|-----------------------------------|------------|--------------------------------------|
|                |                      |                          |                                   |  |   |                 |                                   |            | Product                              |
|                |                      |                          |                                   |  |   |                 |                                   |            | Application                          |
| 4.0mm thick    | 1.5 + 1.5mm<br>thick | 0.75mm to<br>1.6mm thick | Min 20mm<br>Timber<br>penetration | Min 25mm<br>Timber<br>penetration      | 5.5mm thick   | 4.5mm thick     | Min 25mm<br>Timber<br>penetration | 3mm thick  | Max.<br>drilling<br>capacity<br>[mm] |
| M6.0-1.00 x 22 | 12-14 x 20           | M8.0-2.12 x 16           | 10-12 x 20                        | 12-11 x 50<br>12-11 x 65<br>12-11 x 75 | 12-14 x 40<br>(Valleys)<br>12-14 x 55<br>12-14 x 65<br>12-14 x 72<br>(Crests) | 12-14 x 60      | 12-11 x 50                        | 12-11 x 50 | Gauge<br>TPI x Length<br>[mm]        |
|                |                      |                          |                                   |  |   |                 |                                   |            | Product<br>webpage<br>QR code        |



# BN3 METAL-Tite™ Dual-Edge® Self-Drilling Screws


### **Fixing Cladding to Metal**

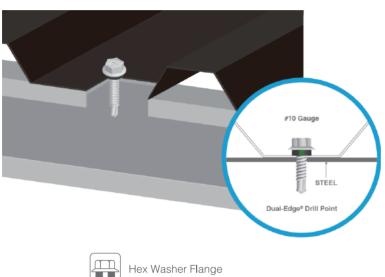



# **ADAPTER TO USE**

Magnetic Hex Socket (5/16")



#### STEEL PENETRATION

Max. 4.0mm thick (For #10 gauge) Max. 6.0mm thick (For #12 gauge)


#### **PRODUCT FEATURES**

Hex Washer Flange Dual-Edge® Drill Point

#### **WASHER**

Eco-BDN® Green Washer





#### **PART NUMBER**



#10 Gauge

SDHC1016C3N 10-16 x 16mm SDHC1020C3N 10-16 x 20mm SDHC1025C3N 10-16 x 25mm




#12 Gauge


SDHC1220C3N 12-14 x 20mm SDHC1225C3N 12-14 x 25mm SDHC1230C3N 12-14 x 30mm SDHC1235C3N 12-14 x 35mm



# BN3 METAL-Tite™ Heavy Duty Self-Drilling Screws


### Fixing to Thick Steel - No. 5 Drill Point

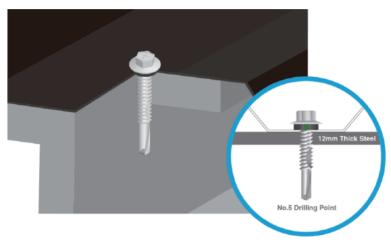



### **ADAPTER TO USE**

Magnetic Hex Socket (5/16")



#### STEEL PENETRATION

Max. 12.5mm thick

#### **PRODUCT FEATURES**

Hex Washer Flange Thread slot No.5 Drilling Point

#### **WASHER**

Eco-BDN® Green Washer





#### **PART NUMBER**


### #12 Gauge


SDH5F1232C3N 12-24 x 32mm SDH5F1238C3N 12-24 x 38mm SDH5F1250C3N 12-24 x 50mm



# BN3 METAL-Tite™ Dual-Edge® Self-Drilling Screws


### Fixing Roof Sheeting to Metal - Full Thread

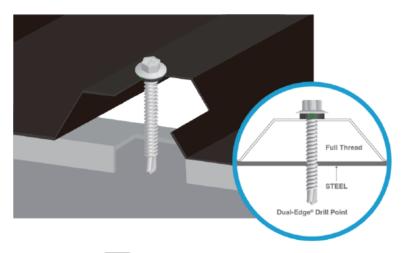

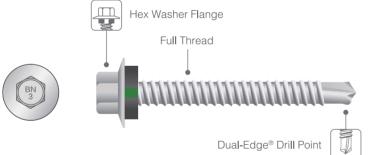

#### **ADAPTER TO USE**

Magnetic Hex Socket (5/16")



#### STEEL PENETRATION

Max. 6.0mm thick (For #12 gauge)

#### **PRODUCT FEATURES**

Hex Washer Flange Full Thread Dual-Edge® Drill Point

#### **WASHER**

Eco-BDN® Green Washer





#### **PART NUMBER**

### #12 Gauge

 SDHC1245C3N
 12-14 x 45mm
 SDHC1275C3N
 12-14 x 75mm

 SDHC1255C3N
 12-14 x 55mm
 SDHC1290C3N
 12-14 x 90mm


SST 1000 hrs + Kesternich 7 cycles


SDHC1265C3N 12-14 x 65mm



# BN3 METAL-Tite™ Dual-Edge® Self-Drilling Screws


# **Fixing Roof Sheeting to Metal - Double Thread**

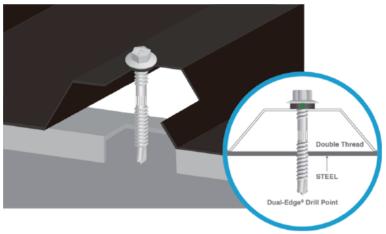

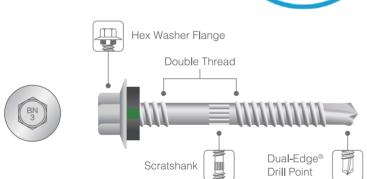

# **ADAPTER TO USE**

Magnetic Hex Socket (5/16")



#### STEEL PENETRATION

Max. 6.0mm thick (For #12 gauge)


#### **PRODUCT FEATURES**

Hex Washer Flange Dual-Edge® Drill Point Double Thread Scratshank

#### **WASHER**

Eco-BDN® Green Washer





#### **PART NUMBER**

### #12 Gauge

 SDHCG1250C3N
 12-14 x 50mm
 SDHCG1285C3N
 12-14 x 85mm

 SDHCG1255C3N
 12-14 x 55mm
 SDHCG12110C3N
 12-14 x 110mm


 SDHCG1265C3N
 12-14 x 65mm
 SDHCG12130C3N
 12-14 x 130mm


 SDHCG1275C3N
 12-14 x 75mm



# BN3 METAL-Tite™ Stitching Fasteners


# **Stitching Fasteners - Reduced Point**

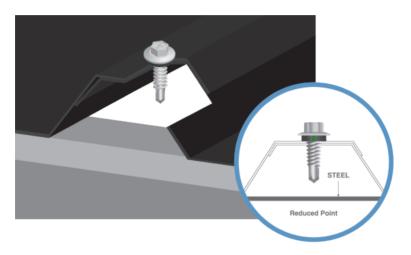



#### **ADAPTER TO USE**

Magnetic Hex Socket (5/16")



#### STEEL PENETRATION

Max. drilling capacity 1+1mm thick

#### **PRODUCT FEATURES**

Hex Washer Flange Thunder-Shot Reduced Point Harpoon Thread

#### **WASHER**

Eco-BDN® Green Washer





### **PART NUMBER**


#15 Gauge


SDHC1520C3N 15-15 x 20mm



# **BN3 METAL-Tite™ Stitching Fasteners**


# **Stitching Fasteners - Needle Point**

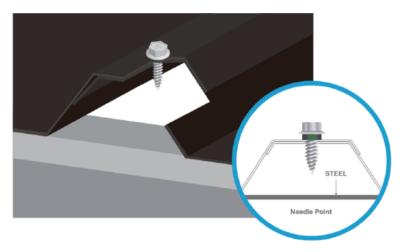



#### **ADAPTER TO USE**

Magnetic Hex Socket (5/16")



#### STEEL PENETRATION

Max. drilling capacity 1+1mm thick


### **PRODUCT FEATURES**

Hex Washer Flange Needle Point

#### **WASHER**

Eco-BDN® Green Washer





### **PART NUMBER**


#10 Gauge


SDHST1019C3N 10-16x19mm



# BN3 METAL-Tite™ Concealed Fixing Fasteners

# Fixing steel sheets into steel substrates

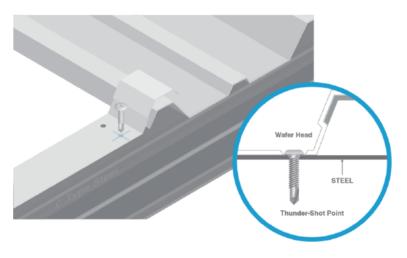



#### **ADAPTER TO USE**

Philips Bit (PH2+)



#### **STEEL PENETRATION**

Max. 4.0mm thick

### **PRODUCT FEATURES**

Wafer Head Philips Drive Thunder-Shot Point

### **PART NUMBER**


# #10 Gauge

SDWF1016C3 10-24 x 16mm SDWF1022C3 10-24 x 22mm




# **BN3 Clip-Fix Button Head Self-Drilling Screws**

BDN Clip-Fix button head self-drilling screws is suited for concealed and pierce fixing snap-lock type cladding system panels to thin gauge steel battens. Clip-Fix's low-profile button head are concealed and will not interfere when panels are snapped into position, providing a clean finish.

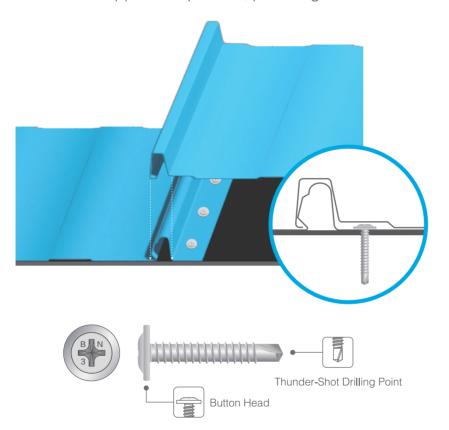

#### **ADAPTER TO USE**

Philips Bit (PH2+)



#### STEEL PENETRATION

Max. 2.5mm thick

#### **PRODUCT FEATURES**

Low profile Button head Philips Drive Thunder-Shot Drilling Point Suited for clip fixing to batten supports

#### **PART NUMBER**


# #8 Gauge


BN3-SDBT0845C3 8-18 x 45mm BN3-SDBT0865C3 8-18 x 65mm



# **BN3 METAL-Tite™ Truss to Plate Connection Fasteners**


### **Truss to Plate Connecting Fasteners**

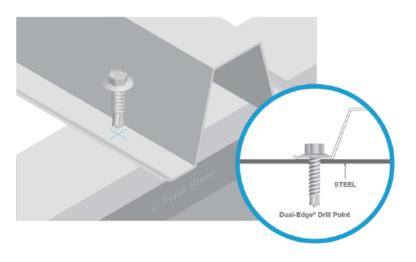



#### **ADAPTER TO USE**

Magnetic Hex Socket (5/16")



#### **STEEL PENETRATION**

Max. drilling capacity 1.5+1.5mm thick

# **PRODUCT FEATURES**

Dual-Edge® Drill Point High pull-out strength


#### **PART NUMBER**

SDHCF1220C3 12-14 x 20mm




# **BN3 METAL-Tite™ Framing Fasteners**

# **Fixing Steel Roof and Floor Trusses**

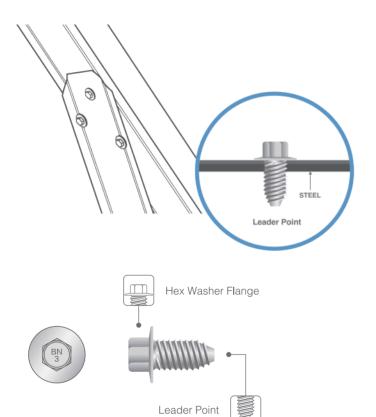

#### **ADAPTER TO USE**

Magnetic Hex Socket (5/16")



#### STEEL PENETRATION

From 0.75mm to 1.6mm thick

### **PRODUCT FEATURES**

- Superior holding strength
- Self space tapping point makes it easy to start and align in the punched hole
- Easy application


#### **PART NUMBER**

SDHTSF0816C3 M8.0-2.12x16mm




# **BN3 FRAME-Tite™ Framing Fasteners**

# Fixing to steel wall frames

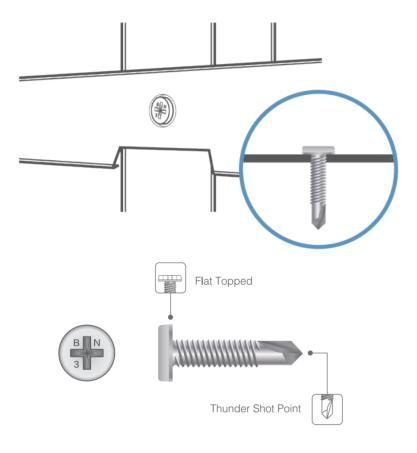

#### **ADAPTER TO USE**

Philips Bit (PH3+)



#### **STEEL PENETRATION**

Max. 4.0mm thick

# **PRODUCT FEATURES**

- Smooth flat top head for discreet fixing
- Superior holding strength
- Easy application


### **PART NUMBER**

SDFHSF0622C3 M6.0-1.00 x 22mm




# **BN3 POLYXPAND™** Plastic Skylight Fixing Fasteners

# **Fixing Polycarbonate Sheeting to Metal**

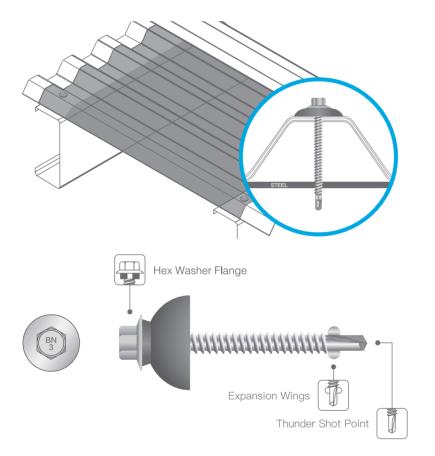

#### **ADAPTER TO USE**

Magnetic Hex Socket (5/16")



#### STEEL PENETRATION

Max 5.5mm Thick

#### PRODUCT FEATURES

Hex Washer Flange Expansion Wings Thunder-Shot Point

#### **WASHER**


Ø 25mm Dome Grey EPDM



#### **PART NUMBER**

### #12 Gauge

SDHCP1240C3D 12-14 x 40mm SDHCP1255C3D 12-14 x 55mm SDHCP1265C3D 12-14 x 65mm SDHCP1272C3D 12-14 x 72mm

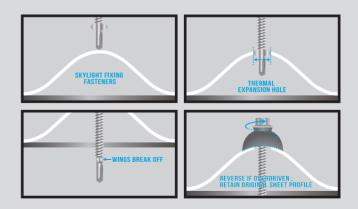




# **POLY-FAST™ Metal** Polycarbonate Roof Fasteners

### **Fixing Polycarbonate Skylight to Steel**

#### **ADAPTER TO USE**

Magnetic Hex Socket (5/16")



#### STEEL PENETRATION

Max 4.5mm thick

#### **PRODUCT FEATURES**


Hex Washer Flange Head Integrated Depth Stop Knurls 11mm Expansion Hole Cutter Thunder Shot Self-Drilling Point




Domed, Weatherseal, Anti-static EPDM Washer





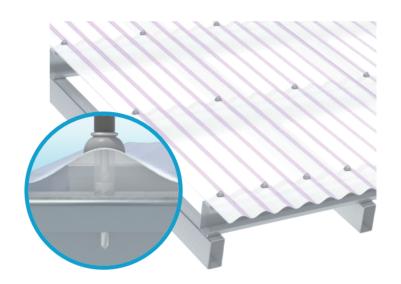

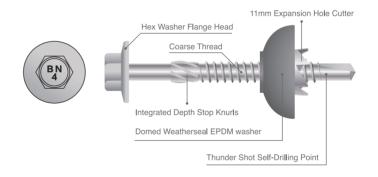

#### **Product Code**

BN4-SDXPS1260C4

#### **Specification**

#12-14 x 60mm

#### **Corrosion Resistance**

True Australian Standard Class 4 Coating (C4)

#### **Installation Procedure**



Saves 50% of labor time, create a perfectly round expansion hole, and fix sheets in one go.



The Expansion Hole Cutter works in combination with the Depth Stop Knurls, and prevents overdriving of the screw after touching the purlin.



A perfectly round nominal 11mm diameter hole is created by theThermal Expansion Hole Cutter during the process.



A large Domed Weatherseal EPDM washer with two concentric sealing rims on the washer underside completes the package.




# **POLY-FAST™ Timber** Polycarbonate Roof Fasteners

# **Fixing Polycarbonate Skylight to Timber**

#### **ADAPTER TO USE**

Magnetic Hex Socket (5/16")



#### **TIMBER PENETRATION**

Min 25mm penetration

#### **PRODUCT FEATURES**


Hex Washer Flange Head Integrated Depth Stop Knurls 11mm Expansion Hole Cutter Type 17 Needle Point



Domed, Weatherseal, Anti-static EPDM Washer





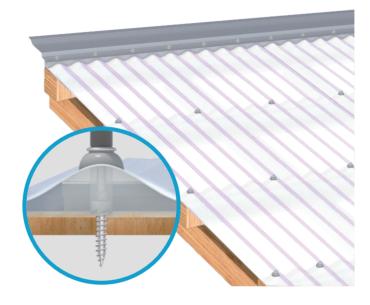

Hex Washer Flange Head

Coarse Thread

Coarse Thread

Integrated Depth Stop Knurls

Domed Weatherseal EPDM washer

Type 17 Needle Point

#### **Product Code**

BN4-T17HXPS1250C4

#### **Specification**

#12-11 x 50mm

#### **Corrosion Resistance**

True Australian Standard Class 4 Coating (C4)

#### **Installation Procedure**



Saves 50% of labor time, create a perfectly round expansion hole, and fix sheets in one go.



The Expansion Hole Cutter works in combination with the Depth Stop Knurls, and prevents overdriving of the screw after touching the purlin.



A perfectly round nominal 11mm diameter hole is created by theThermal Expansion Hole Cutter during the process.



A large Domed Weatherseal EPDM washer with two concentric sealing rims on the washer underside completes the package.




# **POLY-FAST**™ **Duo** Polycarbonate Roof Fasteners

# **Dual purpose, Fixing Polycarbonate Skylight to Metal and Timber**

### **ADAPTER TO USE**

Magnetic Hex Socket (5/16")



#### STEEL PENETRATION

Max. 3.0mm thick

#### **PRODUCT FEATURES**


Hex Washer Flange Head Integrated Depth Stop Knurls 11mm Expansion Hole Cutter Dual purpose Duofix V-Drill



Domed, Weatherseal, Anti-static EPDM Washer





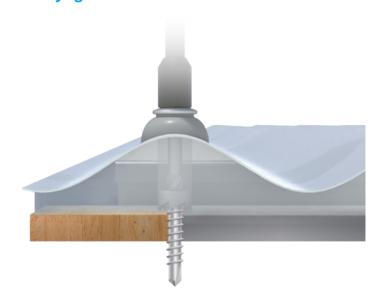



#### **Product Code**

BN3-S17HXPS1250C3

#### **Specification**

#12-11 x 50mm

#### **Corrosion Resistance**


True Australian Standard Class 3 Coating (C3)



# **Collated Drywall Screw**



# **Collated Bulge Head Screws for Thin Steel**



# **Fine Thread**


#### **Dimension**

M3.5 x 25mm #6-18 x 1"
M3.5 x 32mm #6-18 x 1-1/4"

M3.5 x 41mm #6-18 x 1-5/8"



# **Collated Bulge Head Screws for Timber**



# **Coarse Thread**

#### **Dimension**

M3.5 x 25mm #6-9 x 1"


M3.5 x 32mm #6-9 x 1-1/4"

M3.5 x 41mm #6-9 x 1-5/8"



### **Standard Packaging:**

50pcs/strip, 1000pcs/box and 10000pcs/ctn



#### **Inner Box**

Size: 560 x 120 x 50mm




#### **Outer Box**

Size: 573 x 255 x 283mm




# BN3 TIMBER-Tite™ Self-Tapping Screws (Type 17)

# **Fixing roof sheeting to timber - Valley Fixing Fasteners**

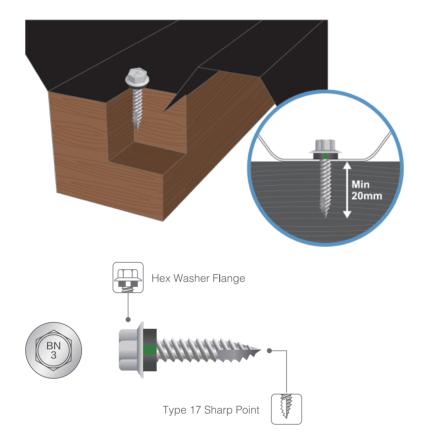

#### **ADAPTER TO USE**

Magnetic Hex Socket (5/16")



### **TIMBER PENETRATION**

Min. 20mm penetration


#### **PRODUCT FEATURES**

Hex Washer Flange Type 17 Sharp Point

### **WASHER**

Eco-BDN® Green Washer





#### **PART NUMBER**


#10 Gauge


T17H1020C3N 10-12 x 20mm



# **BN3 TIMBER-Tite™ Self-Tapping Screws (Type 17)**


# **Fixing roof sheeting to timber - Crest Fixing Fasteners**

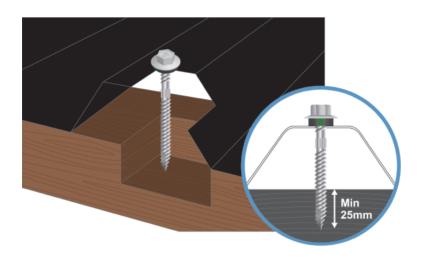

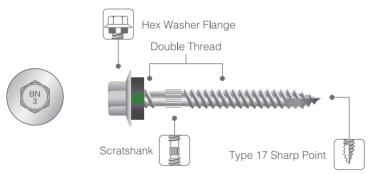

#### **ADAPTER TO USE**

Magnetic Hex Socket (5/16")



#### **TIMBER PENETRATION**

Min. 25mm penetration

### **PRODUCT FEATURES**

Hex Washer Flange Type 17 Sharp Point Double Thread Scratshank

#### **WASHER**

Eco-BDN® Green Washer





#### **PART NUMBER**

# #12 Gauge

T17HCG1250C3N 12-11 x 50mm T17HCG1265C3N 12-11 x 65mm T17HCG1275C3N 12-11 x 75mm

# **Quality Assurance**



To show our commitment to being a trustworthy supplier, and provide the best product and services, **BDN Fasteners**® are manufactured and quality controlled following ISO standards, and is of course, ISO-9001:2015 certified. EN 14566 certificate.







#### **SGS Certification**

BDN Fasteners BN3 Series screws are regularly sent to SGS for Kesternich & Spray Salt Test (1000 hrs) certification.

As part of our new quality assurance policy, which aims to provide high quality, third-party laboratory certified products — customers will now receive the most up-to-date corrosion resistance certifications upon request.



# QUALITY CONTROL IN PROCESS



#### PRE-PRODUCTION INSPECTION

Drawing Check Specific Conditions Check

#### **HEADING / THREADING / PINCH POINTING**

Machinery Condition Check

Molds and Dies Inspection and Setup

#### **HEAT TREATMENT**

Strictly controlled process
Fully equipped with well maintained case depth and hardness testers

#### **SURFACE TREATMENT**

Well equipped with salt-spray and corrosion test machinery

#### **PRE-SHIPMENT INSPECTION**

Manual Sorting and Rearrangement Optical Sorting (Optional)

#### **FINAL INSPECTION**

Dimensions Functionality Aesthetics

#### PRE-SHIPMENT SAMPLES SENT UPON REQUEST









# **Product Guides and Tips**



# **Screw Description**

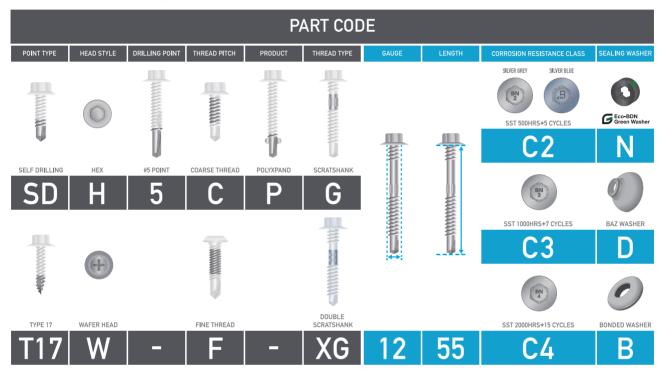

# **Screw Installation**

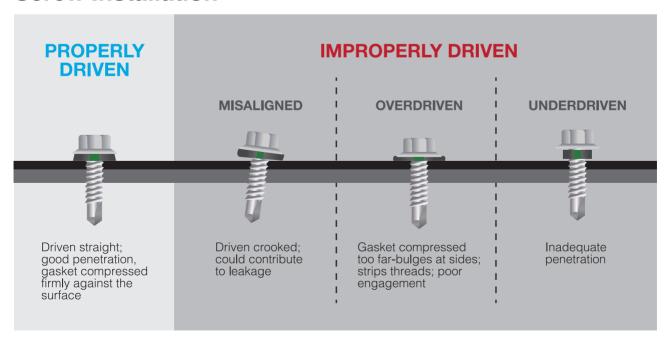



# **Packaging Guide**



Brand new packaging, upsized logos, spiced up head markings and more! Updated color scheme means you'll never have trouble spotting trusty **BDN Fasteners**® anymore!

**Standard Outer Box** 




# Standard Inner Box i8 Size: 125 x 180 x 90mm



# **Product Label**

**BDN Fasteners**® come with large, easy to read product labels. Each product has its own unique label showing the product category, packaged quantities, size, part no., color, and description.

To re-order, use the Part No., Product Description, and Color Code as indicated below. This information can be easily obtained from any of our existing packaging.



Size: 140 x 80 mm



♠ DO NOT!



All **BDN Fasteners**® product labels must be placed at the designated area on the carton as stated below.



**BDN Fasteners**® product labels are always placed at the center of the box.









# **HEADQUARTER - TAIWAN**

No. 47-37, Jiahua Rd., Gangshan, Kaohsiung 820, Taiwan (R.O.C.)

T +886 7-6282702 | F +886 7-6282601 | E info@bdnfasteners.com

www.bdnfasteners.com